

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/001116

International filing date: 17 March 2005 (17.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0406434.1
Filing date: 22 March 2004 (22.03.2004)

Date of receipt at the International Bureau: 18 May 2005 (18.05.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



GB05/1116



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

3 May 2005


The
Patent
Office

1/77

22 MAR 2004

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

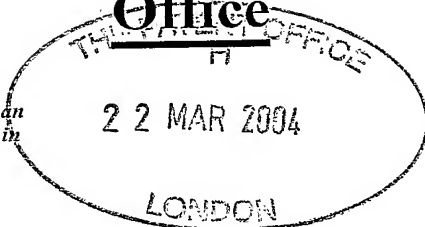

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

P711025GB/51744/AJC

2. Patent application number

(The Patent Office will fill in this part)

0406434.1

23MAR04 E883012-2 D01038

UE P017700 G.3P-0406434.1 CHED

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Dage Precision Industries Ltd.
Rabans Lane
Aylesbury
Buckinghamshire
HP19 3RG
United Kingdom

Patents ADP number (if you know it)

07328487001

If the applicant is a corporate body, give the country/state of its incorporation

England and Wales

4. Title of the invention

High Speed Pull Test Device

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS
Goldings House
2 Hays Lane
London
SE1 2HW

Patents ADP number (if you know it)

1776001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -
Description 5
Claim(s) -
Abstract -
Drawing (s) 1 + 1/77

10. If you are also filing any of the following, state how many against each item.

Priority documents -
Translations of priority documents -
Statement of inventorship and right to grant of a patent (Patents Form 7/77) -
Request for preliminary examination and search (Patents Form 9/77) -
Request for substantive examination (Patents Form 10/77) -
Any other documents (please specify) -

11. I/We request the grant of a patent on the basis of this application.

Signature *Adrian J Chettle* Date 19/03/2004

12. Name and daytime telephone number of person to contact in the United Kingdom Adrian J Chettle 01926 336111

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

P711025GB

High Speed Pull Test Device

This invention relates to a test device for electrical bonds of semi-conductors, and particularly to a device suitable for high speed pull testing.

5

Electrical bonds of semi-conductor devices often comprise an array of solder or gold balls, on a substrate having electrical pathways. These balls are used to connect individual wires to the pathways, or to connect to pathways of another substrate whilst the substrates are in aligned contact. A solder ball will be re-flowed, and a gold ball
10 will be welded.

15

Test devices are required to confirm that the balls have sufficient mechanical adhesion to the substrate, in order to confirm viability of the manufacturing technique. It is known to test in shear by driving a tool at the side of a ball, and in tension by gripping
15 and pulling the ball orthogonally to the substrate.

20

The individual balls are generally arranged in an array, and are very small. A solder ball is typically in the range 1000-75 μ m in diameter, whereas a gold ball is in the range 100-20 μ m in diameter. These 'balls' have a somewhat hemispherical appearance when
20 attached to a substrate. The very small size of some solder and gold balls means that the breaking forces are very low, and special measures are required to reduce friction to a minimum so as to permit breaking force to be measured.

25

Testing of the ball/substrate bond at a high rate of stress is desirable. In the case of a shear test, the tool can be driven against the respective ball from a distance, and thus the necessary impact speed can be generated. However high speed pull testing of balls is problematic because the test tool must first grip the ball, and thus cannot gather speed or momentum before the test commences.

30

The present invention provides one solution to the problem of high speed pull testing.

According to one aspect of the invention there is provided a method of testing an electrically conductive ball adhered to a substrate, and comprising the steps of gripping the ball with a test tool, pulling the ball in a direction substantially orthogonal to the substrate whilst urging the substrate lightly against the ball, and abruptly halting the substrate.

The substrate is lightly supported so as to impose very little gravitational or inertial force on the bond between the ball and the substrate. Light support may for example be provided by a light spring or an air ram. An air ram may be preferable because it has a substantially constant rate.

In a preferred embodiment the substrate is halted by a fixed abutment of a test machine having a frame on which the test tool is movable. Preferably the method commences with the substrate in contact with the abutment, and the test tool is advanced against the light support so as to push the substrate away from the abutment to a position from which the test tool is reversed at speed, thus bringing the substrate into abrupt contact with the abutment.

This arrangement is advantageous since it permits the substrate to be restrained during gripping, and allows the speed of the test tool at the point of restraint of the substrate to be adjusted, according to the distance over which the tool accelerates, or according to the rate of change of acceleration over a fixed distance.

The arrangement may also be used for a static pull test in which the substrate is in contact with the abutment prior to pulling on the ball.

According to a second aspect of the invention there is provided apparatus for tensile testing of an electrically conductive ball adhered to a substrate, the apparatus comprising a gripper for gripping a ball adhered to a substrate, a platen having a surface for supporting the substrate, means for moving the gripper on an axis substantially orthogonal to said surface, means to lightly urge the platen on said axis towards the gripper, and an abutment for the substrate whereby, in use, the platen and gripper move

in unison with respect to the abutment until the substrate contacts the abutment, whereby the gripper and platen tend to move apart.

This apparatus permits sudden application of force to the ball/substrate interface.

5 Conventional means may be provided to permit the breaking load to be determined.

Preferably means are provided to drive the gripper with respect to a fixed abutment. The means to lightly urge the platen toward the gripper may be for example a light spring or an air ram. The force required is just sufficient to avoid drag on the substrate,
10 such as might be imposed by gravitational frictional or inertial forces.

Other features of the invention will be apparent from the following description of a preferred embodiment shown by way of example only in the accompanying drawings in which:-

15

Fig. 1 is a schematic side elevation of test apparatus according to the invention.

The proportions illustrated in the drawing are exaggerated for the purposes of clear understanding of the invention. In particular it must be remembered that the solder ball
20 illustrated is typically around 100 μm in diameter

25

With reference to the drawings a rigid frame 11 comprises a base 12 with upstanding legs 13 at each side, each leg having an inwardly directed arm 14 in a common plane, and defining an opening 15 therebetween.

Centrally located on the base is an air actuator 16 having a ram 17 on which is situated a platen 18. A substrate 19 having a solder ball 20 rests on the platen 18, and at its edges is in contact with the inner side of the arms 14, as illustrated.

30 A pull test tool 21 has opposite jaws 22 which are adapted to open and close about the ball 20, and which is movable orthogonally to the platen 18 to apply a tensile test to the ball.

In use the substrate 19 is positioned on the platen 18 as illustrated, and lightly urged against the arms 14 by the ram 17.

- 5 The test tool 21 is driven down over the ball 20 and the jaws closed, so that the ball is gripped. The test tool is then driven down further against the ram 17 so that the substrate is at a distance from the arms 14.

10 The actuator may have a permanent leak path to permit the ram to retreat without exerting substantive force on the platen.

The test is performed by accelerating the test tool 21 upward, allowing the ram 17 to follow, at all times keeping the platen in contact with the substrate.

- 15 At a desired speed the substrate makes contact with the arms and is immediately stopped. However the test tool continues upward, and by virtue of its grip on the ball can apply a sudden jerk to the ball/substrate interface. By this means the apparatus allows a high speed tensile test to be performed for the purpose of measuring the breaking force of the ball/substrate interface. The breaking force is measured by known
20 apparatus.

25 The illustrated apparatus is diagrammatic, and only one ball is illustrated on the substrate. In practice an array of balls would be present, and means provided to allow either the test head or the frame to be indexed, so as to place the required ball under the test tool. For example the frame 11 could be placed on a conventional movable X-Y table.

30 The frame may of course having a single upstanding peripheral wall in place of legs 13, and circumferentially extending arms. If required conventional means of locating and holding the substrate with respect to the platen may also be provided.

The force exerted by the ram 17 must be sufficient to avoid any tensile load on the bond/substrate interface whilst the ram is moving upward. This force can be determined empirically, and the ram force may for example be adjusted by a variation in air pressure supplied thereto. Other conventional means of supporting the platen 18 may be provided, for example a light spring, in place of the actuator 16.



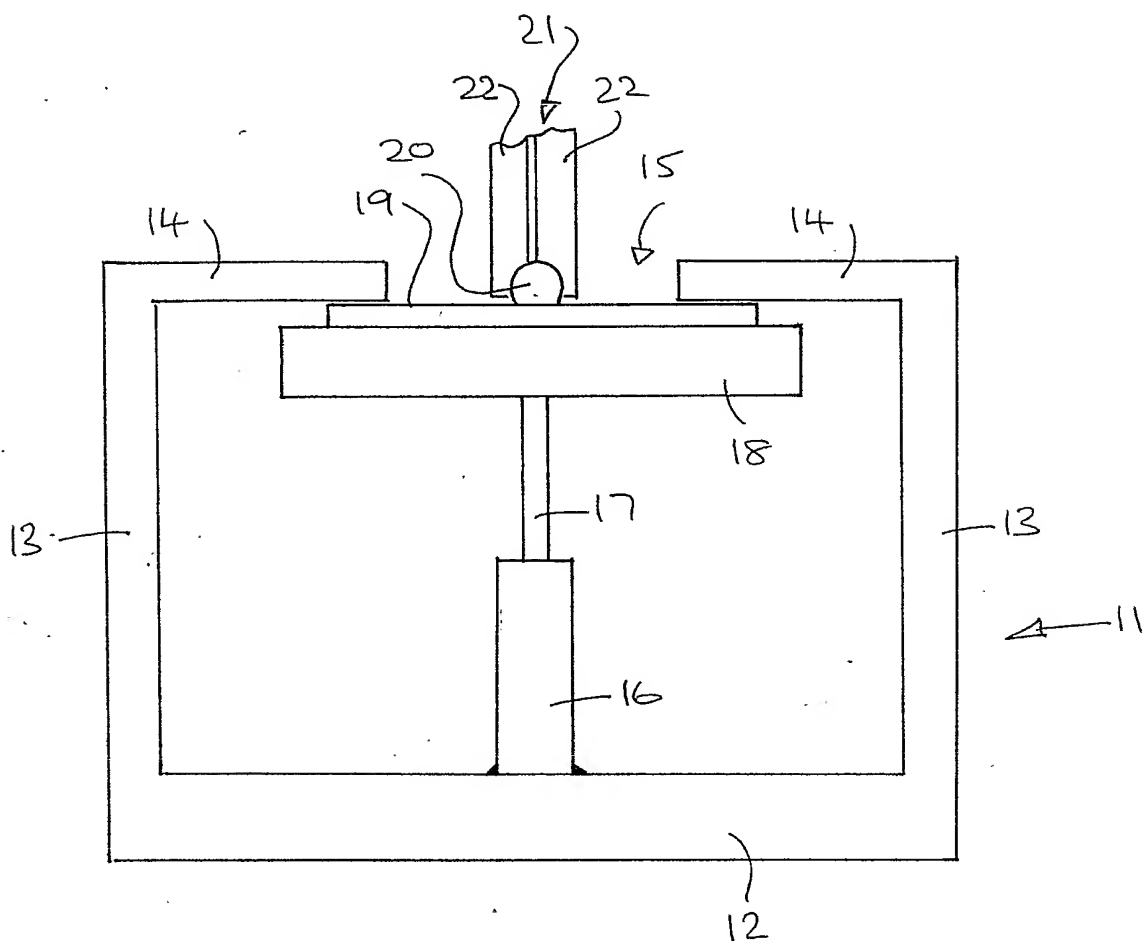


Fig 1

